


FIBERGLASS DRUMS

LIMING • TANNING • COLORING

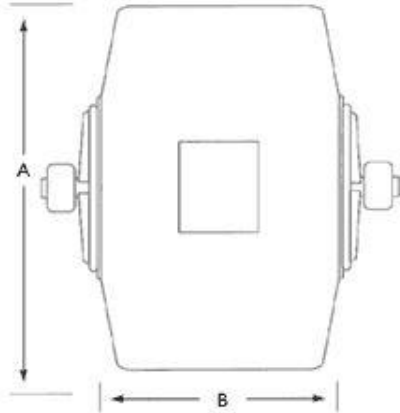

- 40 years of fiberglass drum experience
- Corrosion resistant material
- Low maintenance cost
- Unlike wooden drums, all chemicals act on product, not on drum walls

OPTIONAL

- Integrally molded vortex pump-out and recirculating system
- No auxiliary pumps, no moving parts to wear out.
- Surge tank allows pH and temperature monitoring, as well as sampling

Inside Dimensions	Total Volume In Liters	Door Opening	Nominal Tanning Capacity*						Technical Data*					
			Loaded to 50% of Drum Capacity - Kgs. Hide or Skin Load Float Ratio			Loaded to 75% of Drum Capacity - Kgs. Hide or Skin Load Float Ratio			Horsepower			Speed RPM		
			100%	150%	200%	100%	150%	200%	LIME	TAN	DYE	LIME	TAN	DYE
1.22m x 1.22m 4'-0" x 4'-0"	1,280	355mm x 355mm	290	230	190	480	385	320	-	10	10	-	14	18
1.82m x 1.82m 6'-0" x 6'-0"	4,800	610mm x 610mm 24" x 24"	1,080	865	720	1,800	1,440	1,200	7.5	15	15	5	17	18
2.43m x 1.82m 8'-0" x 6'-0"	8,535	760mm x 760mm 30" x 30"	1,920	1,535	1,280	3,200	2,560	2,130	10	20	20	4	12	16
2.43m x 2.43m 8'-0" x 8'-0"	11,380	760mm x 760mm 30" x 30"	2,560	2,050	1,705	3,840	3,070	2,560	10	25	25	4	12	16
2.75m x 2.13m 9'-0" x 7'-0"	12,600	760mm x 760mm 30" x 30"	2,835	2,270	1,890	4,250	3,400	2,835	10	30	30	3	12	14
2.75m x 2.75m 9'-0" x 9'-0"	16,200	760mm x 760mm 30" x 30"	3,645	2,915	2,430	5,670	4,375	3,640	15	30	40	3	12	12
3.05m x 3.05m 10'-0" x 10'-0"	22,225	915mm x 915mm 36" x 36"	5000	4000	3335	7500	6000	5000	20	40	50	3	12	12
3.05m x 3.65m 10'-0" x 12'-0"	26,675	1065mm x 1065mm 42" x 42"	6000	4800	400	9000	7200	6000	25	50	-	3	10	-
3.65m x 3.65m 12'-0" x 12'-0"	38,400	1065mm x 1065mm 42" x 42"	8640	6900	5755	12960	10370	8630	30	75	-	2	8	-

*Capacities and power requirements listed are nominal and depend on formulation and stock variances

