


INCLINE PROCESSORS

CIP 9000, 12000, 17500

NOMINAL TANNING CAPACITY CHART* - HIDE & SKIN LOAD

MODEL	CAPACITY	50% FLOAT	100% FLOAT	150% FLOAT	200% FLOAT
CIP 9000	9,000 Liters 2377 U.S. Gallons	6,000 kgs 13,225 lbs	4,500 kgs 9,920 lbs	3,600 kgs 7,935 lbs	3,000 kgs 6,610 lbs
CIP 12000	12,000 Liters 3,170 U.S. Gallons	8,000 kgs 17,635 lbs	6,000 kgs 13,225 lbs	4,800 kgs 10,580 lbs	4,000 kgs 8,820 lbs
CIP 17500	17,500 Liters 4,623 U.S. Gallons	11,660 kgs 25,700 lbs	8,750 kgs 19,290 lbs	7,000 kgs 15,430 lbs	5,800 kgs 12,785 lbs

*Capacities listed are nominal and depend on formulation and stock variances

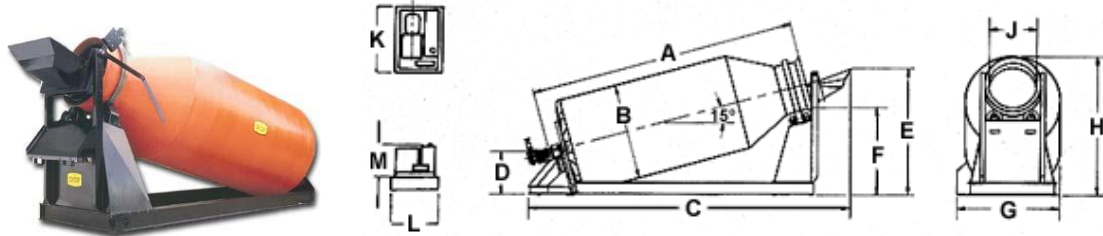

DIMENSIONS MILLIMETERS/FEET

MODEL	A	B	C	D	E	F	G	H	J	K	L	M
CIP 9000	5080 16'8"	2438 8'0"	6543 21'5"	1301 4'3"	3012 9'10"	2001 6'6"	2438 8'0"	3347 10'11"	1143 3'9"	1346 5'5"	864 2'10"	660 2'2"
CIP 12000	5994 19'8"	2438 8'0"	7426 24'4"	1301 4'3"	3249 10'8"	2238 7'4"	2438 8'0"	3583 11'9"	2438 8'0"	1346 5'5"	864 2'10"	660 2'2"
CIP 17500	7436 24'4"	2438 8'0"	8818 28'11"	1301 4'3"	3603 11'10"	2592 8'6"	2438 8'0"	3937 12'11"	2438 8'0"	1575 5'2"	1067 3'6"	660 2'2"

DRIVE CHARACTERISTICS


Electrical and Hydraulic drive characteristics are specified to turn a fully loaded drum at 0 to 12rpm.

MODEL	ELECTRIC MOTOR
CIP 9000	30 Horsepower
CIP 12000	40 Horsepower
CIP 17500	50 Horsepower



INCLINE PROCESSORS

CIP 9000, 12000, 17500

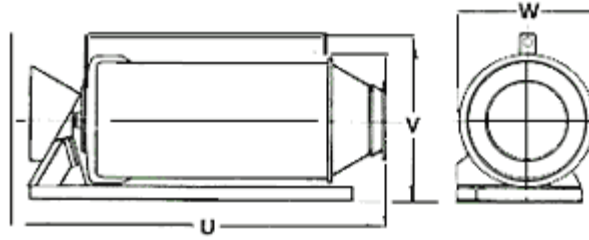

SHIPPING DIMENSIONS AND WEIGHTS

MODEL	U	V	W	Approx. Total Weight
CIP 9000	5732 18'9"	2654 8'8"	2591 8'6"	6,100 kgs 13,900 lbs
CIP 12000	6646 21'9"	2654 8'8"	2591 8'6"	7,170 kgs 15,800 lbs
CIP 17500	8087 26'6"	2654 8'8"	2591 8'6"	7,850 kgs 17,300 lbs

